arXiv:1211.1724v1 [quant-ph] 7 Nov 2012

Coherent feedback that beats all measurement-based feedback protocols

Kurt Jacobs[1,2,3] and Xiaoting Wang[2]
[1]*Advanced Science Institute, RIKEN, Wako-shi 351-0198, Japan*
[2]*Department of Physics, University of Massachusetts at Boston, Boston, MA 02125, USA*
[3]*Hearne Institute for Theoretical Physics, Louisiana State University, Baton Rouge, LA 70803, USA*

We show that for a widely applicable minimal-time control problem, a coherent feedback protocol is optimal, and is faster than all measurement-based feedback protocols, where the latter are defined in a strict sense. Our analysis reveals why coherent feedback can be expected to be superior to measurement-feedback for a broad range of control problems: the optimal protocol exploits a geodesic in Hilbert space, a path that measurement protocols cannot follow. Our results also provide a guide to the design of coherent feedback protocols.

PACS numbers: 03.65.Yz, 85.85.+j, 03.67.-a, 02.30.Yy

Feedback control, useful in reducing the effects of noise on quantum dynamical systems [1], can be implemented in one of two ways: repeatedly measure the system and apply operations conditional on the measurement results [2, 3], or couple the system to another quantum system in such a way that a similar flow of information occurs between the two, but without explicit measurements [4–7]. This second form of feedback is referred to as *coherent feedback*. Our motivation here is that numerical optimization performed on linear feedback networks by Nurdin, James, and Petersen [6] showed that coherent feedback can outperform feedback mediated by measurements, but the reason for this intriguing difference has remained largely a mystery. Just recently it has been shown that the difference is more pronounced for cooling an oscillator, again in the linear setting [8]. The authors of [8] suggest that passing the noise signal though the auxiliary system coherently allows it to cancel the quantum noise in a way that a measured signal cannot. But it is unclear how to design protocols to exploit the coherent advantage, and a state-space explanation for this advantage is yet missing. Understanding why the evolution accessible by coherent feedback is superior to that of measurement-based feedback should provide significant insight into the design of control protocols.

Here we present a clear state-space explanation for the superior performance of coherent feedback, and show how it informs the design of coherent feedback protocols. To do this we consider the following simple control task: transforming an arbitrary mixed state of an N-dimensional system to a specified pure state in the minimal time. We will show that coherent feedback can perform this faster than measurement-based feedback defined in a strict sense, with corresponding implications for measurement-feedback defined in the broadest sense. Because this simple control task involves extracting entropy from a system (reducing it from a mixture to a pure state), our result shows that coherent feedback can extract entropy faster than measurement-feedback. This has profound consequences for all feedback protocols whose purpose is to reduce the effects of noise: since noise continually injects entropy into a system, the faster a protocol can extract this entropy the better it will perform, other things being equal.

To begin, we note that any control problem is nontrivial only under a constraint on the dynamics. Here we will allow any joint unitary evolution to be applied to the system and any auxiliary system, under the minimal constraint that the speed of this dynamics is bounded. Since measurements are mediated by unitary interactions between the system and an auxiliary, we can apply this constraint to both kinds of feedback. Denoting the difference between the minimum and maximum eigenvalues of the joint system/auxiliary Hamiltonian by Δ, our constraint is $\Delta \leq 2\mu$. The constant μ may be thought of as the maximal speed of rotation that the Hamiltonian can generate in Hilbert space [9].

To proceed we must precisely define the two forms of feedback control, and there is a subtlety involved in this definition. A single “step” of a measurement-feedback protocol consists of making a measurement, and applying a unitary operation to the system conditional on the measurement result. A protocol consists of a sequence of these steps. To evaluate the performance of a protocol whose purpose is to prepare a given pure state, $|\psi\rangle$, one must average over all the possible measurement results and any other noise on the system. A useful measure of the performance is the probability that the system will be found in state $|\psi\rangle$, and this is $P = \mathrm{Tr}[|\psi\rangle\langle\psi|\bar{\rho}]$, where $\bar{\rho}$ denotes the averaged system density matrix.

All quantum measurements are described by a set of measurement operators $\{A_n : n = 1, \ldots, N\}$, where n labels the measurement results [10]. For a system initially in state ρ, upon obtaining result n the state becomes $\tilde{\rho}_n = A_n\rho A_n^\dagger/\mathrm{Tr}[A_n^\dagger A_n\rho]$, and the post-measurement state averaged over all the results is $\bar{\rho} = \sum_n A_n\rho A_n^\dagger$. The polar decomposition theorem provides a natural way to define measurement-based feedback: each operator A_n can be decomposed as $A_n = U_n P_n$, where P_n is positive and U_n is unitary. Since the unitary operator U_n preserves the entropy of the system, it is the set $\{P_n\}$ alone that describes the measurement. Upon obtaining result

n from the measurement $\{P_n\}$, the feedback U_n can be applied by the observer. Further, measurements whose operators are all positive (we will call these *bare* measurements) cannot decrease the von Neumann entropy of the system: for all bare measurements $S(\bar{\rho}) \geq S(\rho)$ [11]. Thus under the above definition of measurement-based feedback, the feedback part of the process is *required* to prepare an initial mixed system in a pure state.

Continuous measurements of Hermitian observables are bare measurements [12], and thus feedback loops that use these measurements are measurement-based protocols in the above sense. Nevertheless there are continuous measurements that are not bare and that are routinely implemented experimentally. An example is photon counting or homodyne detection of the light output from an optical cavity [13]. The mere fact that light leaks out of the cavity reduces the cavity energy, and can reduce the entropy of the cavity mode without any feedback or even measurement. We do not wish to argue at this point as to whether of not feedback using homodyne detection should be regarded as pure measurement-feedback or not. Instead we will refer to feedback using bare measurements as "strict-sense" measurement-feedback, and that mediated by more general measurements as "broad-sense" measurement-feedback.

In fact, any measurement-feedback protocol can be implemented in a fully unitary way, in which case it becomes a coherent feedback protocol. First, to implement a general M-outcome measurement one couples the system to an auxiliary system and performs a join unitary operation on them. One then makes a projection measurement on the auxiliary, projecting it onto one of a set of basis states that we will label $|m\rangle_{\rm a}$. By selecting the appropriate joint unitary, one can implement any measurement: that is, the system will be taken to the state $\tilde{\rho}_m = A_m \rho A_m^\dagger / \mathrm{Tr}[A_m^\dagger A_m \rho]$ for each outcome m of the projection measurement for any chosen set of measurement operators A_m.

To implement a measurement-feedback process coherently, we note that in the above measurement procedure, after the joint unitary, within the subspaces defined by each of the states $|m\rangle_{\rm a}$ the system has the state $\tilde{\rho}_m$. We can therefore implement the feedback without making the projective measurement, by instead applying the joint unitary

$$U_{\rm fb} = \sum_m U_{\rm fb}^{(m)} \otimes |m\rangle_{\rm a}\langle m|_{\rm a}. \tag{1}$$

This unitary applies $U_{\rm fb}^{(m)}$ to the subspace in which the system has state $\tilde{\rho}_m$, as required. In this case the average over all the measurement results is given by tracing over the auxiliary system. So long as the measure of performance involves only the average state, as does P, the above coherent feedback procedure reproduces the measurement-feedback.

A coherent feedback protocol is any process in which the system is coupled to an auxiliary, a joint unitary is performed, and the auxiliary is traced over. A coherent protocol can also involve the repeated use of this process. Every coherent feedback protocol can be described by a trace preserving operation of the form $\rho \to \bar{\rho} = \sum_n A_n \rho A_n^\dagger$, for some set of measurement operators. So what is the difference between coherent and measurement-based feedback? The difference between the two, both for strict-sense and broad sense measurements, is that the latter have restrictions, and are thus a subset of the former. For measurement-feedback in the strict sense, each step of the coherent version must be divided into two joint-unitary operations, U_1 and U_2, performed in sequence. The restrictions are as follows: i) The unitary U_1 cannot decrease the entropy of the system. That is $S(\bar{\rho}) = S(\mathrm{Tr_a}[U_1 w U_1^\dagger]) \geq S(\rho)$, where $w = \rho \otimes \sigma$, ρ and σ are respectively the initial states of the system and auxiliary, and $\mathrm{Tr_a}[\cdots]$ denotes the trace over the auxiliary. ii) The unitary U_2 must have the form of $U_{\rm fb}$ in Eq.(1).

To define measurement feedback in the broader sense, we use the broadest possible definition: we place no restriction on U_1 save the constraint(s) imposed by the control problem. Even in this case there remains a difference between coherent and measurement feedback. In a real example of the latter the feedback part, given by U_2, must have an effect on the performance (or it would not be a feedback protocol at all). Thus measurement-feedback in the broadest sense is a feedback process in which U_2 is necessary to obtain the performance of the protocol, and where U_2 is restricted to the form in Eq.(1). We will find that this restriction is significant.

We first present the optimal coherent feedback protocol for our control task. For this purpose we draw from the analysis of cooling in [14]. Denoting a basis for the system by $\{|n\rangle\}$, we may write the initial system state as $\rho = \sum_n p_n |n\rangle\langle n|$, and that of the auxiliary as $\sigma = |0\rangle_{\rm a}\langle 0|_{\rm a}$. We can prepare the system in the single state $|0\rangle$ by applying a Hamiltonian that transforms each of the joint states $|n\rangle|0\rangle_{\rm a}$ respectively to $|n\rangle|0\rangle_{\rm a}$. In fact, for the initial state in question this transformation swaps the states of the two systems. Now, given the Hamiltonian bound $\Delta \leq 2\mu$, the fastest way to transform one state to another is to follow the geodesic (the shortest distance in Hilbert space) [9]. A Hamiltonian that does this is

$$H_n^{\rm geo} = \mu \left(|n\rangle|0\rangle_{\rm a}\langle 0|\langle n|_{\rm a} + |0\rangle|n\rangle_{\rm a}\langle n|\langle 0|_{\rm a} \right), \tag{2}$$

and it maximizes the constraint, achieving the transformation in the shortest time, $\tau_{\rm opt} = \pi/(2\mu)$. We can perform all the transformations at the same time by using the Hamiltonian $H_{\rm geo} = \sum_n H_n^{\rm geo}$, and still satisfy $\Delta = 2\mu$. Thus $H_{\rm geo}$ is an optimal coherent protocol.

As we have elucidated above, under the performance measure P, coherent feedback protocols subsume all measurement-feedback protocols, thus the latter cannot do better than H_{geo}. The key question is whether any measurement-feedback protocol can do as well as H_{geo}. First let us consider measurement-feedback in the strict sense. Recall that the feedback operation is a set of unitary operations performed on the system alone, and therefore cannot reduce the system's entropy. As a result, the measurement part of the protocol must reduce the entropy of the system to zero, which means that the projection measurement on the auxiliary must induce a projection measurement on the system. This will only happen if a set of orthogonal states of the auxiliary are perfectly correlated with a set of pure states of the system. To project the system onto all its basis states, this set of pure states must include a basis for the system. Now we need to examine how the joint unitary U_1 creates the required correlation. Since the auxiliary starts in state $|0\rangle_{\mathrm{a}}$, for each of the basis states of the system, U_1 must rotate the state of the auxiliary to a different orthogonal state. In fact, the time taken to perform these rotations depends on the dimension of the system. Assume the system has two states labelled $|+\rangle$ and $|-\rangle$. Then conditional on the state $|\pm\rangle$ one can rotate $|0\rangle_{\mathrm{a}}$ by $\pm 45^\circ$ to obtain the state $|\pm\rangle_{\mathrm{a}} = (|0\rangle_{\mathrm{a}} \pm |1\rangle_{\mathrm{a}})/\sqrt{2}$. The states $|+\rangle_{\mathrm{a}}$ and $|-\rangle_{\mathrm{a}}$ are orthogonal, but since both rotation angles are only 45°, the required time is $\pi/(4\mu)$ rather than the $\pi/(2\mu)$ required to transform one state into another that is orthogonal to it. If we increase the size of the system, N, then the situation changes. The need to transform $|0\rangle_{\mathrm{a}}$ to a larger number of mutually orthogonal states necessitates increasing the rotation angle, since the overlap of at least one of these orthogonal states with the initial state must be no greater than $1/\sqrt{N}$. The minimum rotation angle is thus $\theta_N = \cos^{-1}(1/\sqrt{N})$, and the minimum rotation time is θ_N/μ.

Now we need to know the time required for the feedback operation. Since the measurement cannot decrease the entropy of the system, it must produce the same number of orthogonal output states as the size of the support of ρ, which we will call K. This can be seen by noting that ρ could have maximum entropy on its support. The final average state must also have at least this entropy, and so must contain at least K orthogonal states. The feedback process must rotate each of the K output states to the desired pure state, $|\psi\rangle$. By the same argument as that used above for the time taken by U_1, this requires a time θ_K/μ. Since K can be as large as N, there are initial states ρ for which the required time is θ_N/μ. We can conclude that to prepare an N-dimensional system in a pure state, from an arbitrary initial state, using measurement-feedback in the strict sense, requires a minimum time of $\tau_{\mathrm{mf}} = 2\cos^{-1}(1/\sqrt{N})/\mu$. For a single qubit, $\tau_{\mathrm{mf}} = \tau_{\mathrm{opt}}$, but for $N \geq 3$, $\tau_{\mathrm{mf}} > \tau_{\mathrm{opt}}$. The ratio $\tau_{\mathrm{mf}}/\tau_{\mathrm{opt}}$ increases monotonically with N, and as $N \to \infty$, $\tau_{\mathrm{mf}} = 2\tau_{\mathrm{opt}}$.

Now consider measurement-feedback in the broadest sense. In this case only the second part of the protocol — the feedback — is constrained. However, in a real measurement-based feedback protocol, the feedback part must have a non-trivial effect on the system. That is, the feedback part must be required to obtain the performance, or it would be discarded and the "protocol" would not longer be a feedback protocol, merely a measurement process. But the geodesic evolution is given by a Hamiltonian than cannot be written in the form required of the measurement-based feedback Hamiltonian, Eq.(1). Therefore, to the extent that a feedback protocol uses measurement-feedback, to that extent it cannot follow the optimal path, and it therefore must be slower.

The above results provide a guide to the design of coherent feedback protocols. Every interaction of the form $H_{\mathrm{m}} = XY$, where X and Y are Hermitian operators for different systems, generates a unitary of the measurement-feedback form, Eq.(1). (Unitaries that implement bare measurements are also of this form, but with the system and auxiliary switched.) It is simple to show that every interaction of this form has eigenvectors that are unentangled product states of the two systems. On the contrary, the optimal coherent-feedback interaction Hamiltonian, Eq.(2), does not have the form of H_{m}. It is instead a sum of terms of the form $H_{\mathrm{c}} = AB^\dagger + A^\dagger B$, where both A and B are not Hermitian. This kind of interaction has matrix elements that simultaneously change the states of both systems, and in particular has eigenstates of that are maximally entangled states of the two systems. We therefore expect appropriately chosen interactions with terms of the form H_{c} to be more efficient at extracting entropy than interactions of the form H_{m}. In fact, the difference between the coherent and measurement-based feedback scenarios compared by Nurdin *et al.* [6] is exactly the replacement of interactions of the form H_{m} with those of the form H_{c}.

We now test our expectation by comparing various continuous-time coherent feedback protocols in which the objective is to place a thermal mechanical resonator in its ground state. As "case 1" we take the scenario considered by Hamerly and Mabuchi [8], in which the resonator is coupled to a zero-temperature cavity mode (an auxiliary resonator) by one-way (cascade) fields. The position of the resonator is coupled to an output field, and this output is fed into the auxiliary. The feedback is obtained by coupling the output of the auxiliary to the position of the resonator, so that the auxiliary applies a force to the resonator. The result of this is an effective coupling of the form xp_{a} between the two oscillators, where $x \equiv (b + b^\dagger)$ is the mechanical position, and $p_{\mathrm{a}} \equiv -i(a - a^\dagger)$ is the auxiliary momentum. The quantum Langevin equations of motion for the coupled systems are [8]

$$\dot{a} = -[i\Delta + \textstyle\sum_i \Gamma_i/2]a + \lambda x + \sum_i \sqrt{\Gamma_i} a_i^{\mathrm{in}}(t) \qquad (3)$$

$$\dot{b} = -[i\Delta + \gamma/2]b - i\lambda p_{\mathrm{a}} + \sqrt{\gamma} b^{\mathrm{in}}(t). \qquad (4)$$

Here λ is the effective coupling rate between the two oscillators, and $\lambda = \sqrt{k\Gamma_1}$, where k is the output coupling

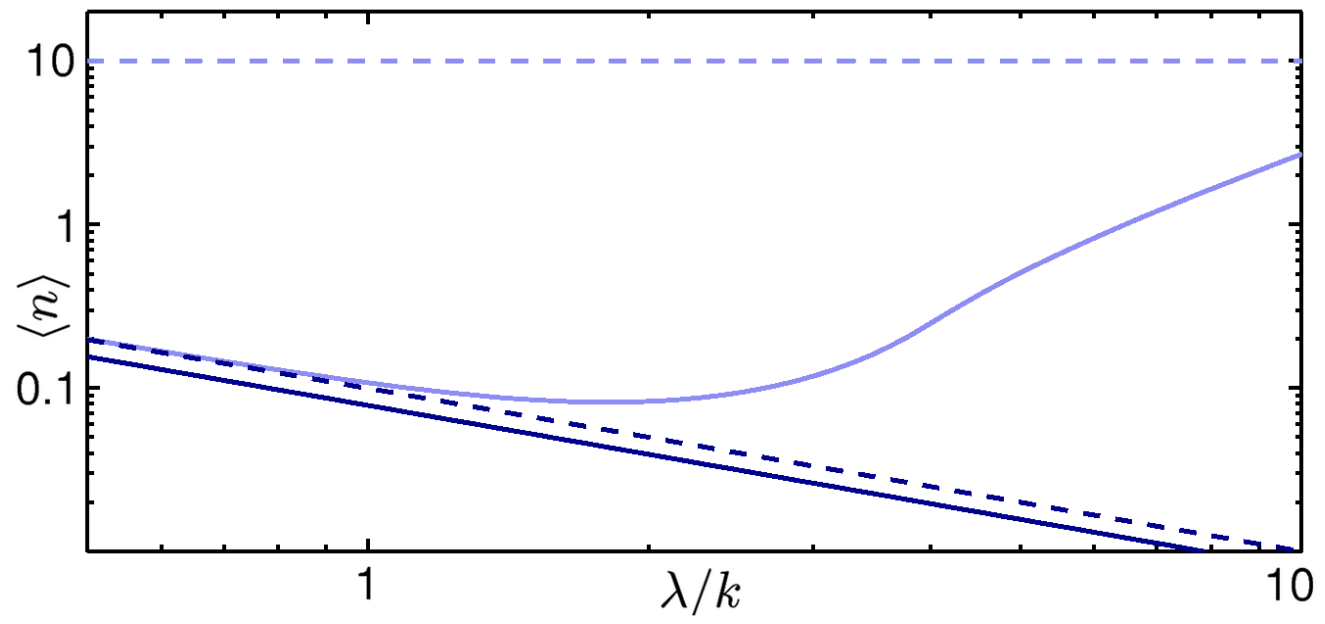

FIG. 1. The minimal value of the mechanical steady-state average phonon number is plotted for various coherent feedback protocols, as a function of the effective interaction rate, λ. See text for the definitions of the various cases. Light dashed line: case 1, $\Delta = 0$ (fails to cool). Light solid line: case 1, $\Delta = 10k$ (achieves cooling for $\lambda \ll \Delta$). Dark dashed line: case 2 (achieves cooling with no lower bound). Dark solid line: case 3 (achieves the best cooling).

rate for x, and Γ_1 is one of two damping rates for the auxiliary, the other one being Γ_2. The damping rate of the mechanical resonator is γ, and Δ is the effective frequency of both oscillators. The latter is adjustable by detuning the cavity input field, modulating the interaction with the position, and working in a rotating frame [15]). The input quantum noise sources $a_i^{\rm in}(t)$ are at zero temperature, so that $\langle a_i^{\rm in}(t) a_i^{\rm in\dagger}(t')\rangle = \delta(t'-t)$, while $\langle b^{\rm in}(t), b^{\rm in\dagger}(t')\rangle = (n_T+1)\delta(t'-t)$, where n_T is the average number of thermal phonons in the resonator.

As our second case we take the same system, but replace the interaction $H_1 = \lambda x p_{\rm a} = -i\lambda(b+b^\dagger)(a-a^\dagger)$ with $H_2 = i\lambda(ba^\dagger - b^\dagger a)$, an interaction similar to $H_{\rm geo}$. Recall that since the control is steady-state, entropy extracted from the system must be continually dumped out of the auxiliary, and this is achieved by the damping rates Γ_i. However, this damping is equivalent to a continuous measurement process, and we can expect this to interfere with the near-geodesic interaction. We therefore consider a third case, in which the auxiliary is not damped at all. In this case we replace the auxiliary with a fresh auxiliary after a time $\tau = \pi/(2\lambda)$ — the time it takes to complete a single state-swap — and repeat this process.

To compare the above cases we measure time in units of $1/k$, and set the parameters of the mechanical resonator to be $n_T = 10$ and $\gamma = 0.01k$. We then minimize the mechanical steady-state average phonon number, $\langle n\rangle \equiv \langle b^\dagger b\rangle$, over the control parameters Γ_1 and Γ_2, for each value of λ. Choosing $\Delta = 0$ we find that no cooling is possible: while cooling is in theory possible with this configuration, the simple auxiliary does not process the position information in the right way to achieve it. Switching to case 2, we find that not only is cooling achieved, but we can cool as cold as we like merely by increasing λ. We further note that the interaction H_2 is obtained from H_1 merely by making the rotating-wave approximation [16]. This means that setting $\Delta \gg \lambda$ in case 1 will effectively transform H_1 into H_2. So returning to case 1 we choose $\Delta = 10$. We find as expected that for small λ we obtain the performance of case 2, and as λ increases this performance degrades. Finally we simulate case 3, and as expected we find that the performance is consistently better than case 2. The steady-state values of $\langle n\rangle$ for all cases are shown in Fig. 1.

Acknowledgements: The authors are partially supported by the NSF projects PHY-1005571, PHY-0902906, and PHY-1212413, and by the ARO MURI grant W911NF-11-1-0268.

---

[1] D. Dong and I. R. Petersen, IET Control Theory & Appl. **4**, 2651 (2010); H. M. Wiseman and G. J. Milburn, *Quantum Measurement and Control* (CUP, Cambridge, 2010); C. Altafini and F. Ticozzi, IEEE Trans. Automat. Contr. **57**, 1898 (2012).
[2] A. C. Doherty and K. Jacobs, Phys. Rev. A **60**, 2700 (1999); N. Yamamoto and S. Hara, *ibid.* **76**, 034102 (2007) .
[3] A. Kubanek *et al.*, Nature **462** 898 (2009); R. Vijay *et al.*, Nature **490**, 77 (2012); Brakhane *et al.*, Eprint: arXiv:1206.3184 (2012); D. Ristè, C. C. Bultink, K. W. Lehnert, L. DiCarlo, arXiv:1207.2944 (2012).
[4] H. M. Wiseman and G. J. Milburn, Phys. Rev. A **49**, 4110 (1994); S. Lloyd, *ibid.* **62**, 022108 (2000).
[5] J. Gough and M. R. James, IEEE Trans. Automat. Contr. **54** 2530 (2009).
[6] H. I. Nurdin, M. R. James, and I. R. Petersen, Automatica **45**, 1837 (2009).
[7] J. Zhang, R.-B. Wu, Y.-X. Liu, C.-W. Li, and T.-J. Tarn, IEEE Trans. Automat. Contr. **57**, 1997 (2012).
[8] R. Hamerly and H. Mabuchi, "Advantages of coherent feedback for cooling quantum oscillators," (2012), eprint: arXiv:1206.0829; *ibid.* "Coherent controllers for optical-feedback cooling of quantum oscillators," (2012), eprint: arXiv:1206.2688.
[9] J. Anandan and Y. Aharonov, Phys. Rev. Lett. **65**, 1697 (1990); N. Margolus and L. B. Levitin, Physica D: Nonlinear Phenomena **120**, 188 (1998).
[10] We choose the index n to be discrete, for simplicity.
[11] T. Ando, Linear Algebra Appl. **118**, 163 (1989).
[12] K. Jacobs and D. A. Steck, Contemp. Phys. **47**, 279 (2006).
[13] I. Kenyon, *The Light Fantastic: A Modern Introduction to Classical and Quantum Optics* (OUP, Oxford, 2011).
[14] X. Wang, S. Vinjanampathy, F. W. Strauch, and K. Jacobs, Phys. Rev. Lett. **107**, 177204 (2011).
[15] I. Wilson-Rae, N. Nooshi, W. Zwerger, and T. J. Kippenberg, Phys. Rev. Lett. **99**, 093901 (2007).
[16] E. K. Irish, Phys. Rev. Lett. **99**, 173601 (2007).